



Model 350

80.26.2520



RONDA® 350 is a compact and very robust vacuum cleaner with built-in pump for continuous operation and pumping out of the liquid collected. The machine is suitable for vacuuming large quantities of both clean water and dirty water with a small content of wearing particles. The machine is ideal for disaster services, in the construction industry, for vacuuming of cooling water in connection with diamond drilling/cutting etc.

RONDA® 350 filters the liquid in the filter sack, and particles larger than 1.0 mm are retained, while the remnant is pumped on. The filter sack can be emptied and reused.



Furthermore, the machine is equipped with a washable polyester filter that protects the motor top and the working environment if fine dust, not mixed with liquid, is to be vacuumed.

There will often be a lot of foam in the container in connection with disaster services, or if dirty water from concrete processing is to be vacuumed.

RONDA® 350 is equipped with a newly developed float valve construction allowing the volume of foam to take up to half of the container capacity, without any risk of the foam spreading into filter and motor.

TECHNICAL DATA

By pass motor	1200 W
Voltage	230 V
Power outlet, max.	- W
Data of the installed motor:	
- Vacuum, max. (per motor)	2450 mmWC
	24 kPa
- Air flow, max. (per motor)	58 l/sec.
	209 m ³ /h
Noise level (ISO 11201)	<70 dB(A)
* Suction power, max. ((P2) based on IEC 60312)	285 W
Collection capacity (bag/container)	-/30 l
Pre-filter	0.34 m ²
HEPA-filter	- m ²
Height	1000 mm
Width	575 mm
Length/depth	590 mm
Weight without accessories	35 kg
Container coupling	ø 50 mm
Length of supply cable	8 m
Collection capacity, liquid	30 l
Lifting height, pump	9 m
Amount of water, pump	300 l/min
Discharge pipe stub	5/4 inch

* Data of the vacuum cleaner with 4 m ø 38 mm hose

- Heavy-duty oil-cooled submersible pump
- Thermo protection of pump
- Continuous vacuuming of liquids (max. 130 l/min.)
- Washable polyester filter class M
- Handy, compact and easy to manoeuvre
- Strong trolley frame
- Powerful suction motor
- Low noise level
- Retains even fine particles
- Integrated tube holding device



Model 350


STANDARD ACCESSORIES:

40 mm professional's set80.33.4016

- 1 Plastic hose, ø 38 mm, 4 m84.54.3809
- 2 Complete tube with bend.....80.52.2160
- 3 Crevice nozzle80.34.4000
- 4 Dusting brush80.34.4001
- 5 Upholstery nozzle80.34.3604
- 6 Plastic adapter80.34.4002
- 7 All-purpose floor nozzle V-37084.38.3621

STANDARD FILTERS:

- 1 Filter sack with bottom rail84.67.4029
- 2 Polyester filter, class M84.67.5011

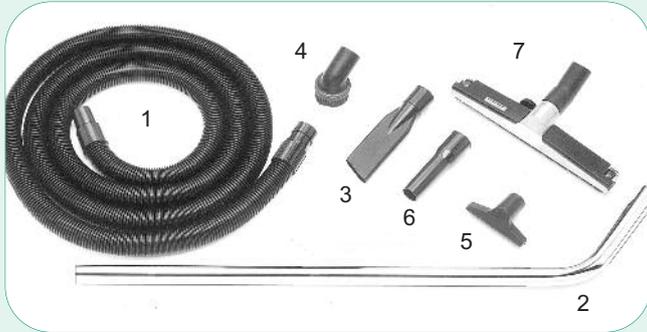

OPTIONAL EXTRAS:

- Discharge hose, flat, can be rolled up,
ø 32 mm84.54.0004
(please specify required length in metres)