



Model 330

RONDA® 330 DK.....	80.26.1545
RONDA® 330 EXP	80.26.2545

RONDA® 330 is a compact and very robust vacuum cleaner with built-in pump with level sensor for automatic start intended for continuous operation and pumping out of the liquid collected. The machine is suitable for vacuuming large quantities of both clean water and dirty water from floods.

Suited for disaster services, emptying of vats, cleaning of basins, draining of cellars, and within the construction trade etc.

RONDA® 330 filters the liquid collected in the filter sack, and particles larger than 0.5 mm are retained, while the rest is pumped on. The filter sack can be emptied and reused.


TECHNICAL DATA

By-pass motor A 40	1000	W
Voltage	230	V
Power outlet, max.	480	W
Data of the installed motor:		
- Vacuum, max. (per motor)	2200	mmWc
	21	kPa
- Air flow, max. (per motor)	53	l/sec.
	191	m³/h
Noise level (ISO 11201)	<70	dB(A)
* Suction power, max. ((P2) based on IEC 60312)	285	W
Collection capacity (bag/container)	-/42	l
Pre-filter	0.34	m²
HEPA-filter	-	m²
Height	815	mm
Width	440	mm
Length/depth	425	mm
Weight without accessories	20	kg
Container coupling	ø 50	mm
Length of supply cable	8	m
Collection capacity, liquid	30	l
Head, pump	7,5	m
Quantity of water, pump	187	l/min.
Discharge pipe stub	5/4	inch

* Data of the vacuum cleaner with 4 m ø 38 mm hose


- Submersible pump in stainless steel
- Handy, compact and easy to manoeuvre
- Strong trolley frame
- Powerful suction motor
- Low noise level

Model 330

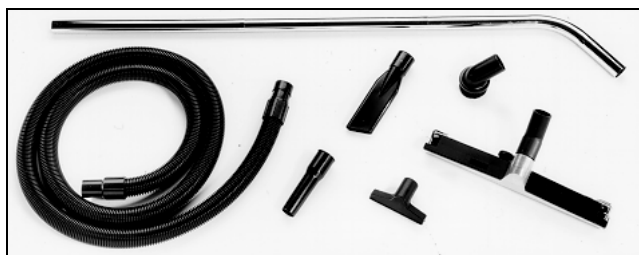

STANDARD ACCESSORIES:

40 mm professional's set	80.33.4016
Crevice nozzle.....	80.34.4000
Round brush.....	80.34.4001
Adapter	80.34.4002
Upholstery nozzle.....	80.34.3604
Tube.....	80.52.2160
Plastic hose, 4 m.....	84.54.3809
Floor nozzle V-370	84.38.3621

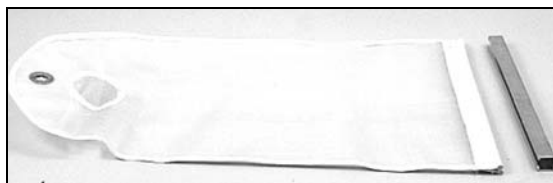


STANDARD FILTERS:

1 Filter sack, #0.5 mm	84.67.4025
------------------------------	------------

OPTIONAL EXTRAS:

Drainage hose, flat $\varnothing$ 32 mm	84.54.0004
5/4 Geka coupling with swivel joint and fastener	85.95.4700
5/4 Geka coupling with swivel joint (for connection of 2 hoses).....	85.95.0015
Hose clamp for above.....	83.97.4761

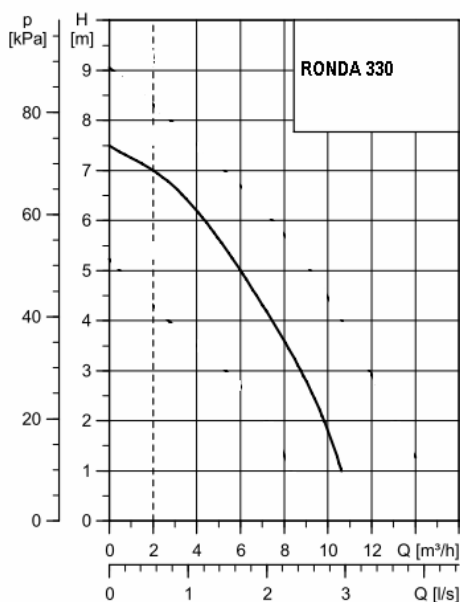

* Depending on the load (vacuum) in the wet cleaner, 0.5-2.5 m is used for vacuum in the container.

